SENECA

T Series - Field converters

EN

T201DCH50-LP

Contact-less direct and alternating TRMS current transducer

General Specifications

- Direct and alternating current transducer galvanically insulated from the measuring circuit.
- Measurement principle: Hall Effect
- Possibility to measure the direct and alternating component of TRMS current.
- No shunt, no wasted power of primary current circuit and no dissipation.
- Unipolar or bipolar measure.
- High measurement accuracy: 0.5 %.
- Suitable for Seneca modules with power supply sensors at 12V⎓ and input 4-20 mA.
- Two DIP-Switches selectable ranges.
- Damping filter availability to improve stable reading.
- Suitable for batteries , battery chargers, solar panels, power units and generic dc loads.
- Compact overall dimensions: 41 x 44 x 26 mm.



CE c UL us LISTED 3LUT

SENECA s.r.l.
Via Austria, 26 – 35127 – PADOVA – ITALY
Tel. +39.049.8705355 - 8705359 - Fax +39.049.8706287
Manuals and configuration software are available at website: www.seneca.it/products/t201dch50-lp
Technical support: support@seneca.it Product Informations: sales@seneca.it

ISO 9001:2008

This document is property of SENECA Srl. Duplication and reproduction are forbidden, if not authorized. Contents of the present documentation refers to products and technologies described in it. All technical data contained in the document may be modified without prior notice.Content of this documentation is subject to periodical revision.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


Technical features			
INPUT			
Measure type	AC / DC TRMS or Bipolar DC		
Range	0-50 Arms, 0-25 Arms, -50 – +50 A Bipolar or -25 – +25 A Bipolar, selectable by dip-switch.		
Peak factor	1.3		
Bandwidth	1 kHz		
Insulation	When a sheathed wire is used, the insulation voltage is set by sheath properties. On a bare wire, it's stated 3 kV ∿		
Over-current	300 A permanent		
OUTPUT AND POWER SUPPLY			
Type	4 – 20 mA, max. load R_{LOAD}=600 Ω. Screw terminals: ✪ and		
Terminals	Screw terminal pitch 5.08mm for max 2.5 mm^2 cables.		
Hole diameter	12.3 mm		
Power supply	9 – 28V⎓(between ✪ and ✪).		
Protections	- Polarity reversal - Over-Voltage.		
Fail indication	< 3.8 mA		
Max. indication	< 22 mA		
ACCURACY			
	Range	Precision ∿	Precision ⎓
Over the 2% of End of Scale	50 A 25 A	0.5% of end scale.. 1% of end scale.	1% of end scale. 2% of end scale.
Under the 2% of End of Scale	50 A 25 A	1% of end scale. 2% of end scale.	2% of end scale. 4% of end scale.
Resolution	Output: 10 bit (1000 points) Input: 12 bit (4000 points).		
Temperature coefficient	< 200 ppm/°C.		
Error due to EMI	< 1%		
Response time	- Fast filter: 500 ms. - Slow filter: 1000 ms.		
Measure hysteresis	0.3% of the end scale (typical)		
NORMATIVE			
CE c UL us LISTED 3LUT	EN61326 (EMC requirements). EN61010-1 (safety).		

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


OVERVOLTAGE CATEGORY	
Bare conductor	CAT. III 300V
Insulated conductor	CAT. III 600V
OPERATING CONDITION	
Protection degree	IP20.
Operating temperature	-20 – +70 °C.
Storage Temperature	-40 – +85 °C.
Humidity	10 – 90 % non-condensing.
Altitude	Up to 2000 m a.s.l.
CASE	
Weight	47 g.
Overall dimensions	41 x 44 x 26 mm (without terminals).
Box material	PA6, black color

DIP-switches							
Range		*Filter (10% – 90%)*		*Mode*		*Not used*	
DIP Switch 1		DIP Switch 2		DIP Switch 3		DIP Switch 4	
	0 – 50A		Filter = 500ms		∿ / ⎓ TRMS	⬇	Must be OFF
⬆	0 – 25A	⬆	Filter =1000ms	⬆	⎓ Bipolar		

In the table the ⬆ symbol corresponds to the switch in the ON position;
The instrument is factory delivered with range 50A, 800ms filter and RMS mode.

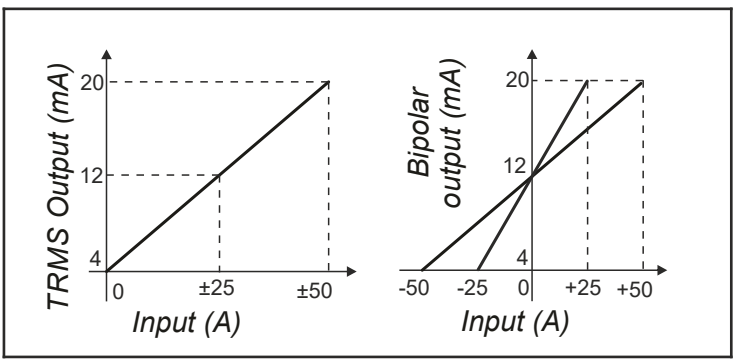

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

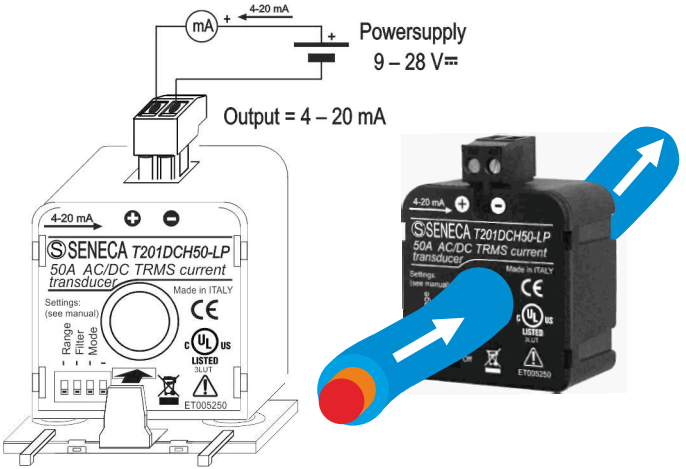

Mounting

The device can be located in any position and place, in accordance with the operating conditions above stated. Use the included holder bracket when fixing it to a DIN rail. WARNING: High-strength magnetic fields may change the output value: let avoid closeness to permanent magnets, electromagnets or iron bulks that cause such a modification of the surrounding magnetic field; try a different arrangement or orientation if zero error was greater than expected.

Multi-turn primary winding to improve sensibility

You can increase the sensibility of the device simply passing several times in the hole with the measuring current, realizing turns with multiplicative effect: for example, passing 5 times in the hole, as to see 4 turns, choosing a 50 A range, you get an equivalent sensibility of 10 A full-scale. When you make this, let dispose the turns with symmetry in order to preserve accuracy: use diametric contraposition with 2 turns, cross disposition with 4 turns, 60° with 6 turns, and so on.

Disposal of electrical & electronic equipment (applicable throughout the EU and other countries wit separate collection programs). This symbol, found on your product or on its packaging, indicates that this product should not be treated as household waste when you wish to dispose of it.Instead,it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate disposal of it. The recycling of materials will help to conserve natural resources. For more detailed information about the recycling of this product, please contact your local city office, waste disposal service or the retail store where you purchased this product.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000