Via Germania, 34 - 35127 Padova
Tel. +39049.8705.359-408-355
Fax +39049.8706287
email info@seneca.it

POWER SUPPLIES

S50 - CURRENT LOOP POWER SUPPLY

Stabilized power supply with 115 / 230 Vac mains input and 24 Vdc 40 mA output.



Used industrially to power instruments in 4-20 mA current loop or to power from the mains instruments that require 24 Vdc stabilized voltage.


The input is protected against line overvoltages by means of a varistor. The insulation between the mains and low voltage circuits is 4500 Vac. The output is self-protected against short circuits.

The self-extinguishing Noryl case is the width of 2 DIN modules and is designed to fit on 35 mm mounting rail (DIN 46277).

TECHNICAL DATA

- Power supply : 115 / 230 Vac +/- 10% 50 / 60 Hz
- Power consumption : 1,5 VA
- Output : stabilized 24 Vdc 40 mA
- Operating temp. : - 10 / + 60 °C
- Humidity : 90 % a 40 °C (non-condensing)
- Dimensions (b x h x d) : 35 x 95 x 72 mm
- Weight : approx. 150 g.

CONNECTIONS

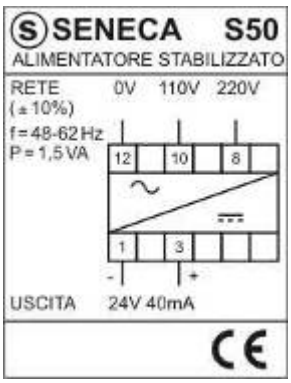

ORDERING CODES

Code	Power supply
S50-1-ST	115 - 230 Vac
S50-3-ST	24 Vac

For more info please refer to the operating manual

Download documentations referring to this product:

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000